FOR / POUR
XBOX 360® | PS3™ I PC I Mac

Watch Turtle Beach product training videos at:
youtube.com / TurtleBeachVideos

product support and warranty information:
TurtleBeach.com / support

Copyright © 2012 Voyetra Turtle Beach, Inc. (VTB, Inc.) All rights reserved. No part of this package may be reproduced without permission. Turtle Beach, the Turtle Beach Logo, Voyetra, Ear Force, and Engineered for Gaming are either trademarks or registered trademarks of VTB, Inc. All other trademarks are properties of their respective companies and are hereby acknowledged. PlayStation is registered trademark and PS3 is a trademark of Sony Computer Entertainment. Xbox, Xbox 360, and Xbox LIVE are registered trademarks of Microsoft Corporation. Mac is a registered trademark of Apple, Inc. Manufactured under license from Dolby Laboratories. Dolby and the double-D symbol are trademarks of Dolby Laboratories. Made in China. © 2012 Activision Publishing, Inc. ACTIVISION, CALL OF DUTY, CALL OF DUTY BLACK OPS and stylized roman numeral II are trademarks of Activision Publishing, Inc.

This product is compliant with the Consumer Product Safety Improvement Act of 2008, Public Law 110-314 (CPSIA)

RoHS COMPLIANT N30375

LIMITED EDITION

TURTLE BEACH®

EAR FORCE®

SIERRA

User Guide

DOLBY DIGITAL

DSP DIGITAL SIGNAL PROCESSING™
PROGRAMMABLE GAME AUDIO

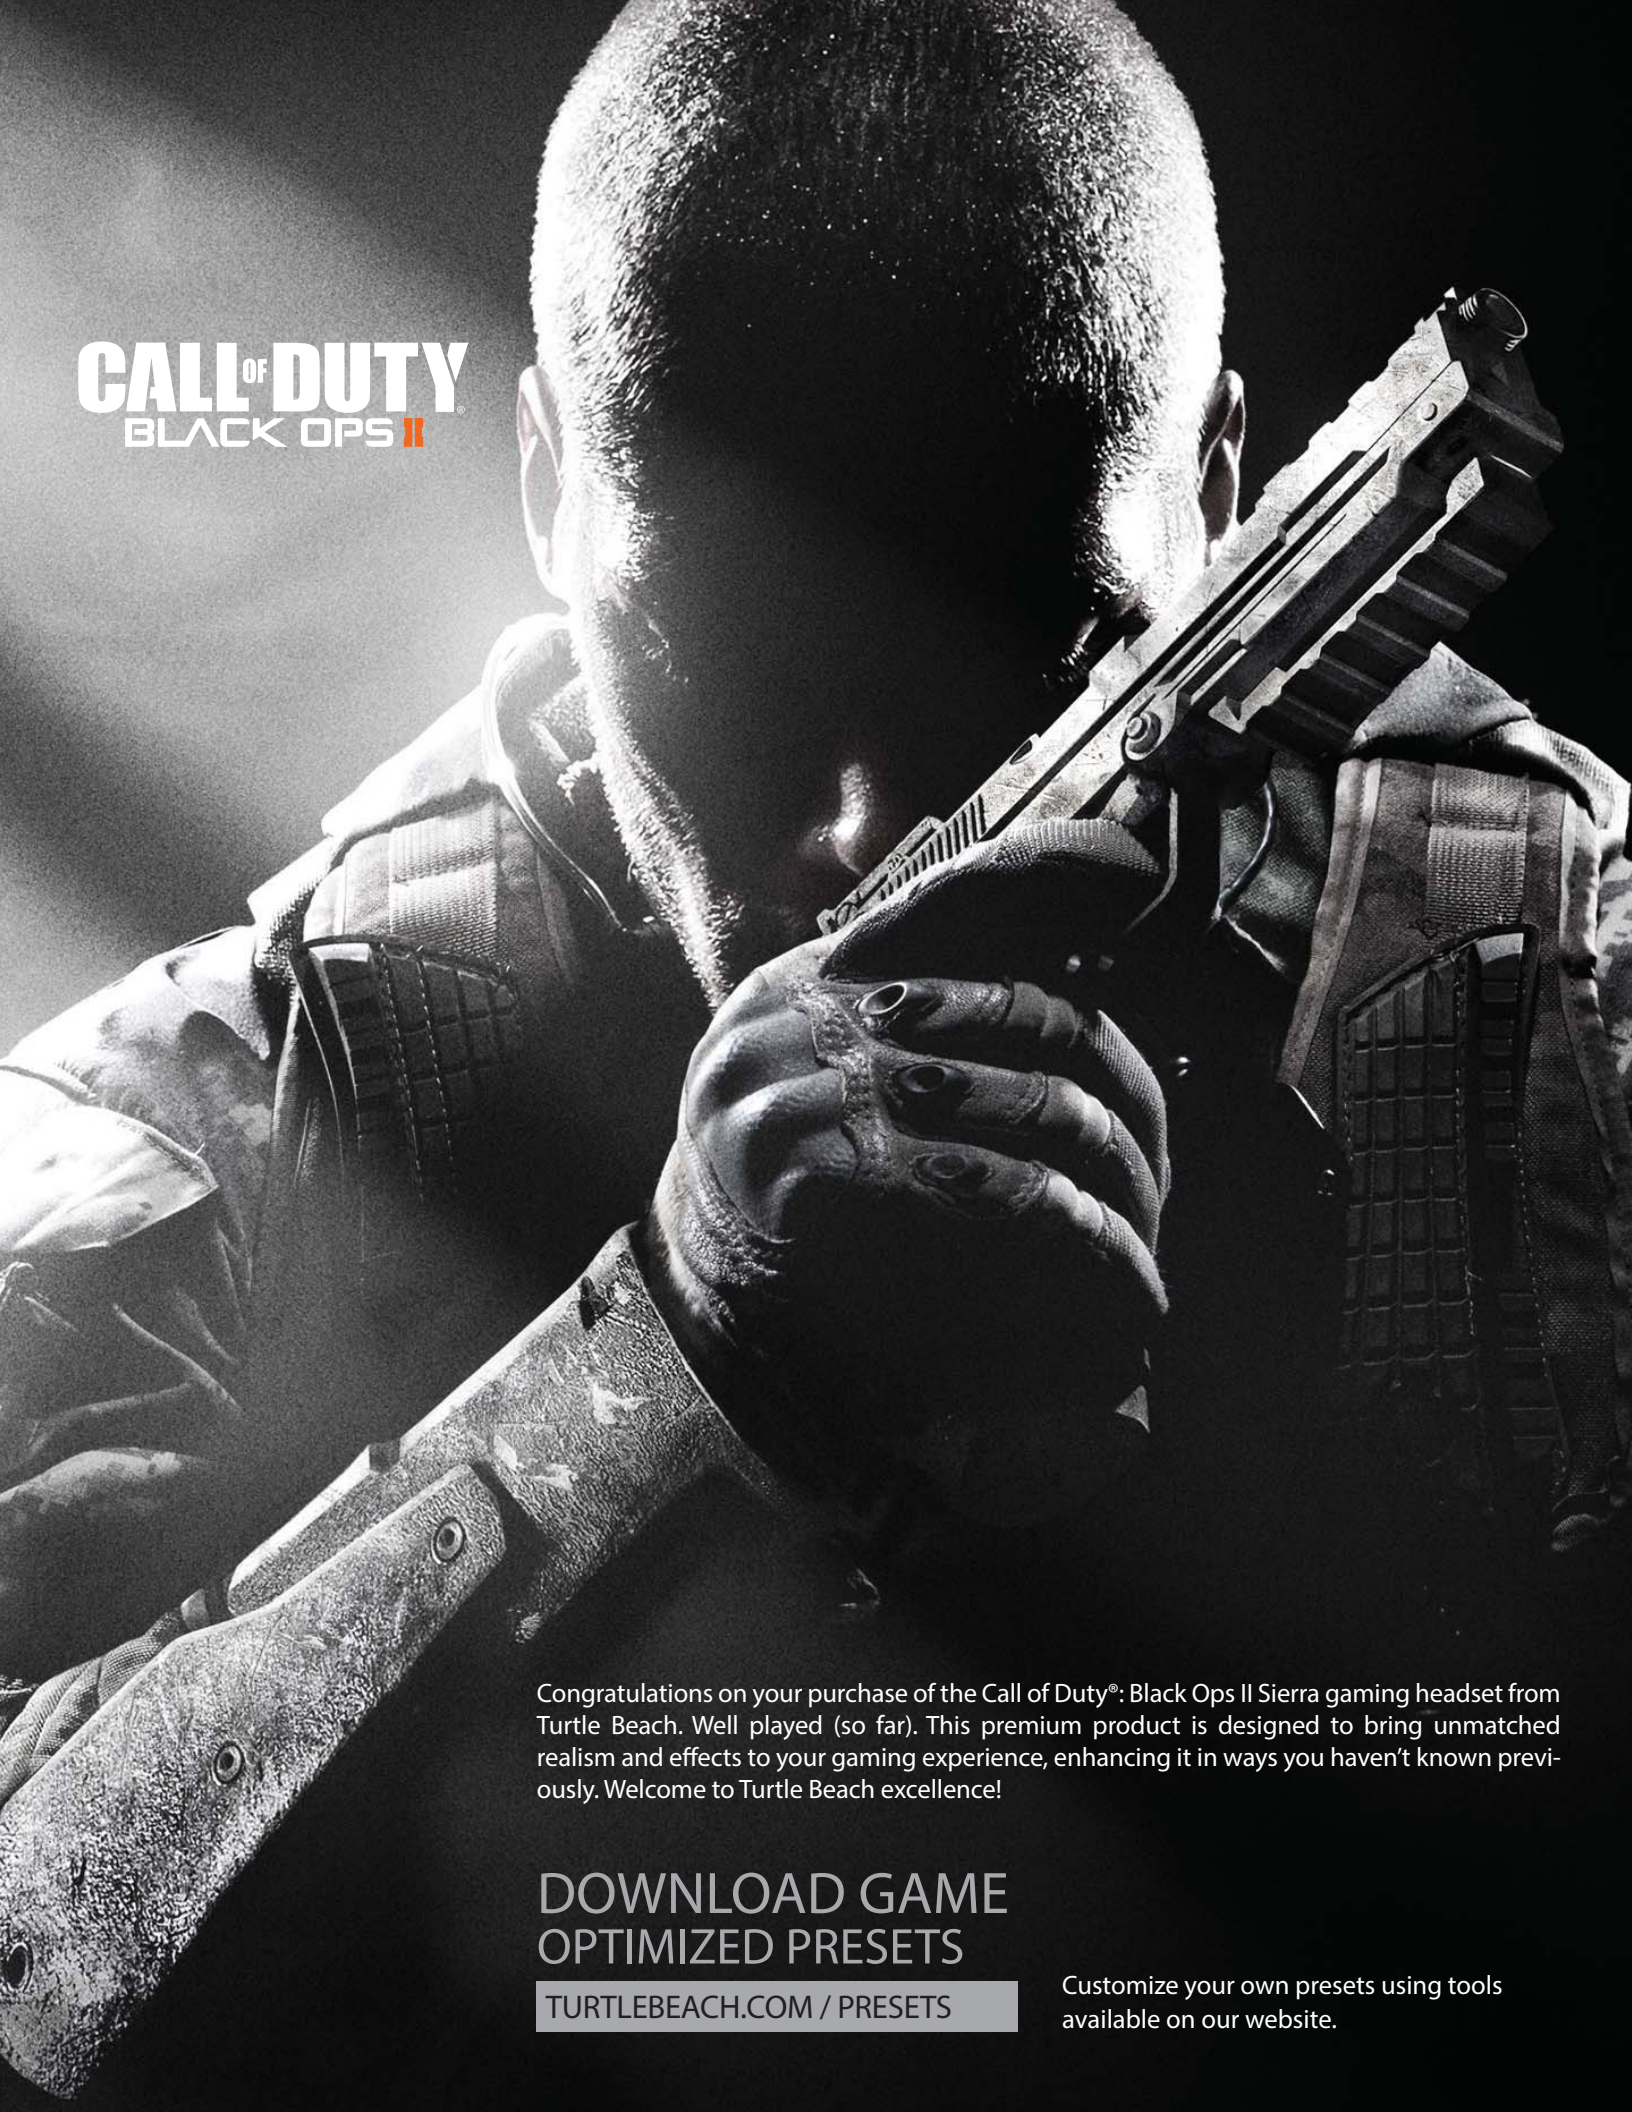

Congratulations on your purchase of the Call of Duty®: Black Ops II Sierra gaming headset from Turtle Beach. Well played (so far). This premium product is designed to bring unmatched realism and effects to your gaming experience, enhancing it in ways you haven't known previously. Welcome to Turtle Beach excellence!

DOWNLOAD GAME OPTIMIZED PRESETS

TURTLEBEACH.COM / PRESETS

Customize your own presets using tools available on our website.

Table of Contents

Headset Overview 2
Package Contents 3
Feature/Function Map 4
Control Unit Functions 6
Using your Sierra Headset on XBOX 360 8
Using your Sierra Headset on PS3 10
Using your Sierra Headset on a PC 13
Using your Sierra Headset on a Mac 15
Using your Sierra Headset with Other Devices 16
Speaker Mode 17
Presets 18
Specifications 19
Compliance / Conformity 22
Warranty 24

Headset Overview

Your Turtle Beach Call of Duty®: Black Ops II Sierra headset is compatible with XBOX, PS3 and PC or Mac gaming platforms. You can enjoy gaming at home or at tournaments and while on the go with portable game systems and mobile devices like smartphones and tablets.

- Programmable presets that change your sound environment and allow you to hear sound cues you'd normally miss. Down load from turtlebeach.com/presets the Advanced Sound Editor tool to download, manage or create presets for your headset.
- Dolby® Surround Sound for XBOX and PS3 console gaming as well as PC and Mac
- Adjustable surround sound angles for the optimum surround sound experience
- Auxiliary line input for use with a digital music player or mobile phone
- The Control Unit is fully compatible with the Turtle Beach TM1 Tournament Mixer facilitating multiple player communication
- Durable 4-pole, 3.5mm breakaway cable connects to the Control Unit, portable game systems and mobile devices for great sound across all your gaming and digital media.

Operating Modes

There are two operating modes on your Sierra Headset's Control Unit:

1. Headset Mode (LED Indicator: ORANGE) – includes nine game presets. When used with a PC, the USB channel is set to 5.1.

2. Speaker Mode (LED Indicator: BLUE) –for use with external stereo speakers includes nine speaker presets for surround sound virtualization.

Package Contents

Sierra Headset
with Removable Mic Boom



Control Unit

Console Interface

Turtle Beach Sticker



Console Interface USB Cable



XBOX 360 Talkback Cable



Digital Optical Cable



Headset Breakaway Cable



Control Unit Extender Cable

Presets Reference

Quick Start Guide

Feature / Function Map (Location of controls / inputs)

Console Interface

1. Auxiliary Input
2. USB Input
3. Digital Input
4. Digital Pass Thru
5. USB In / Out
6. 9-PIN DIN

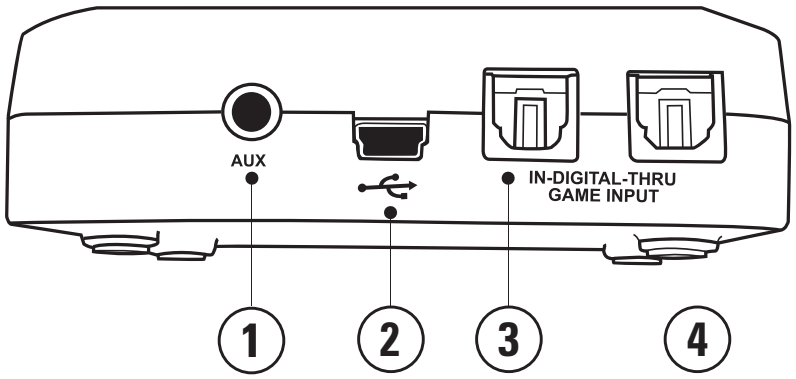

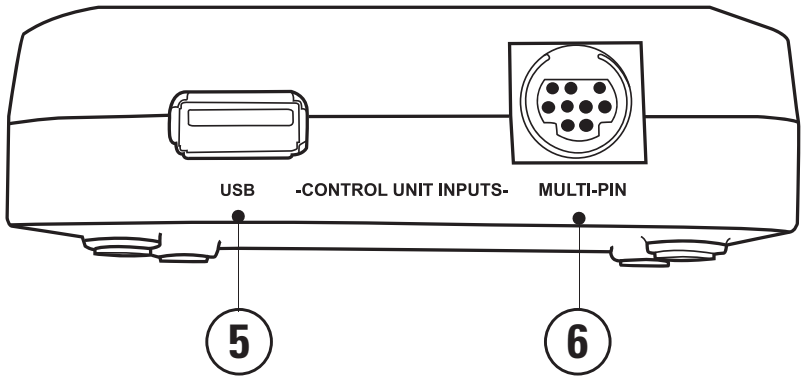

Feature / Function Map (Location of controls / inputs)

Control Unit

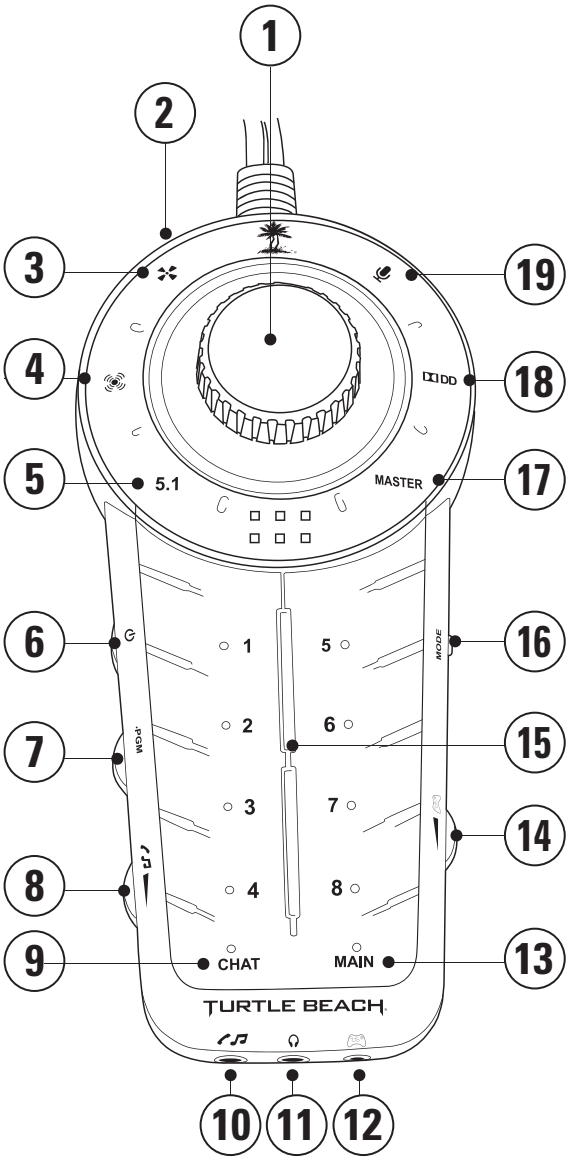

Refer to page 6 for a description of button functions.

1.Game Volume Wheel (Multifunction) / Mute
2. External Speaker Jack (located on side of controller)
3. Speaker Angles (Capacitive Touch)*
4. Surround Sound Toggle (Capacitive Touch)*
5. Speaker Selection (Capacitive Touch)
6. Power Switch
7. Programmable Control Dial
8. Auxilliary / Phone Volume Control Dial
9. Chat Preset Button (Capacitive Touch)
10. Auxilliary Input Jack (4-pole, 3.5mm)
11. Headset Jack (4-pole, 3.5mm)
12. Talkback Cable Jack (2.5mm)
13. Main Preset Button (Capacitive Touch)
14. Chat Volume Control
15. Preset buttons (Capacitive Touch)
16. Mode Button
17. Master Game Volume (Capacitive Touch)
18. Dolby Digital Indicator*
19. Mic Mute (Capacitive Touch)*

* When a function is enabled, the associated LED turns orange. When disabled, LED turns red.*

Control Unit Functions

Game play with Turtle Beach Sierra headset is performed using the functions of the Control Unit. The Control Unit has the following functions:

1. Game Volume Wheel: This controls the master game volume as well as the individual 5.1 speaker volumes. Press the wheel to mute game audio and again to unmute. The circular LED around the knob lights RED when muted and ORANGE when functioning normally.
   Volume Knob Speaker Function LEDs/ 5.1 Button/ Master Button: Six different LEDs at the bottom of the knob indicate the current function:
   - Pressing the MASTER switch turns on all 6 LEDs. The knob now controls the master game volume.
   - Each press of the 5.1 button cycles through different sets of speakers.
     - First press activates volume control for Front L / R speakers
     - Second press activates Surround L / R speakers
     - Third press activates the Center speaker
     - Fourth press activates Sub Woofer speaker volume control.
   - Press in the Volume Knob to confirm your adjustments.

   Note: When the surround sound feature is turned OFF, the 5.1 speaker volume button is disabled.
2. External Speaker Jack: Connects external desktop speakers. Use the Mode Button to enable this jack.
3. Speaker Angles: Use this switch to toggle through the virtual speaker surround sound angles. When Surround Sound is disabled, this function is not available.
4. Surround Sound Toggle: Use this to toggle between surround sound mode (when enabled) and stereo mode (when disabled).
5. Speaker Selection (5.1): Refer to Game Volume Wheel above.
6. Power Switch: Turns power ON or OFF.
7. Programmable Control: Controls Mic. Monitor levels by default. This function can be changed using Advanced Sound Editor tool.
8. Auxiliary Input Volume: Sets the volume level of the auxiliary input.
9. Chat Presets Button: Press once to enable Chat Presets for buttons 1 – 8 become Chat Presets (Times out after 15 seconds). Press again to return to Game Presets.
10. Auxiliary Input Jack: Connects an external digital music player or mobile phone.
11. Headset Jack: A 3.5mm 4-pole jack connects the headset.
12. Talkback Jack: Connects to the XBOX®360 Controller for XBOX Live chat.

Control Unit Functions

13. Main Preset Button: Toggle between default flat preset and the last active preset. In Chat Presets mode, toggles between default flat Chat preset and the last active Chat preset.
14. Chat Volume Control Dial: Sets the chat volume level.
15. Presets Switches (1 – 8): Select from Game Presets 1 – 8.
16. Mode Button: Press this button to select Headset or Speaker mode. LED lights ORANGE for Headset mode, and BLUE for Speaker mode.
    - When Speaker mode is selected, the Speaker presets are loaded and the Speaker jack is enabled.
    - When Headset mode is selected, the Headset presets are loaded and the Headset jack is enabled.
17. Master Game Volume: Refer to Game Volume Wheel.
18. Dolby Digital Indicator: Indicates whether Dolby® Digital is enabled/disabled.
    Note: On PC, the LED will light RED. Dolby Digital is not active. Instead 5.1 digital PCM audio is being channeled through the USB connection.
19. Mic Mute: Press once to mute the mic. Press again to enable the mic.

Using your Sierra Headset on XBOX 360®

1. Connect the Console Interface to the Xbox 360 game console using the Digital Optical Cable and Console Interface USB cable as shown below. Connect the Digital Optical Cable to the Console Interface's DIGITAL IN jack. Note: Older Xbox 360 models will also require an Xbox 360 Audio Adapter Cable (sold separately).
2. Connect the Control Unit to the Console Interface as shown below. Utilize the Control Unit Extender Cable if necessary.
3. Connect your Xbox Controller to the Control Unit using the Xbox Talkback Cable as shown below.
4. Connect the Sierra Headset to the Control Unit using the Headset Breakaway Cable as shown below.
5. (Optional) Connect your mobile phone or digital media player with a 3.5mm stereo cable (not included)

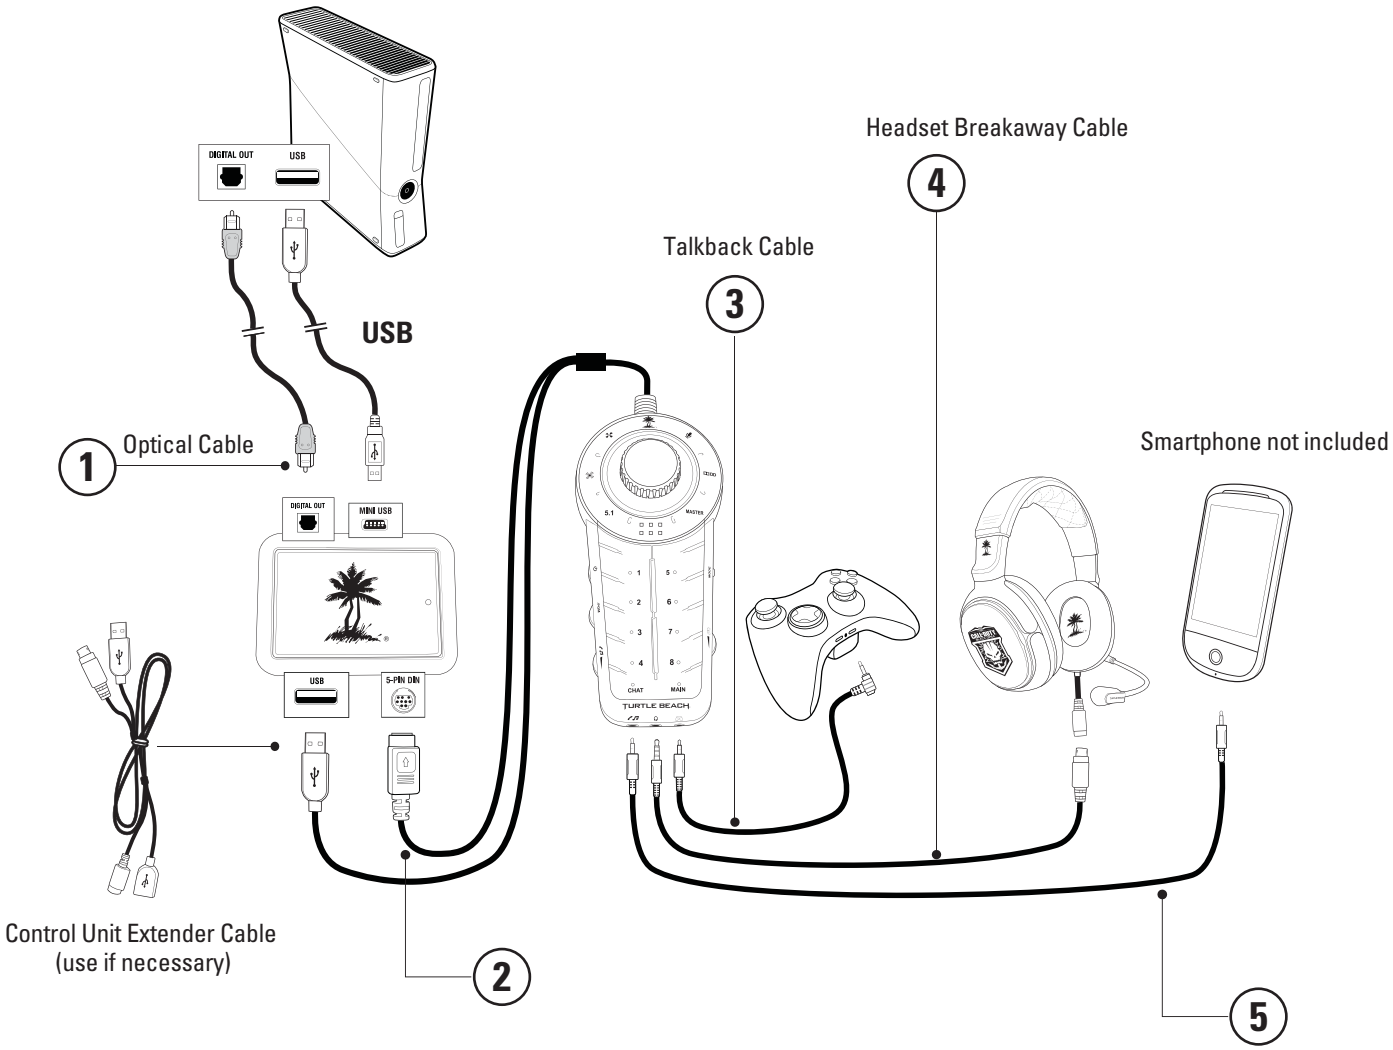

Using your Sierra Headset on XBOX 360®

XBOX 360 Audio Configuration

Digital Output
Digital Stereo
Dolby Digital 5.1
Dolby Digital 5.1 with WMA Pro
Current Setting
Dolby Digital
Choose the digital output type for your system.
This setting only applies to optical digital and HDMI audio outputs.
A Select
B Back

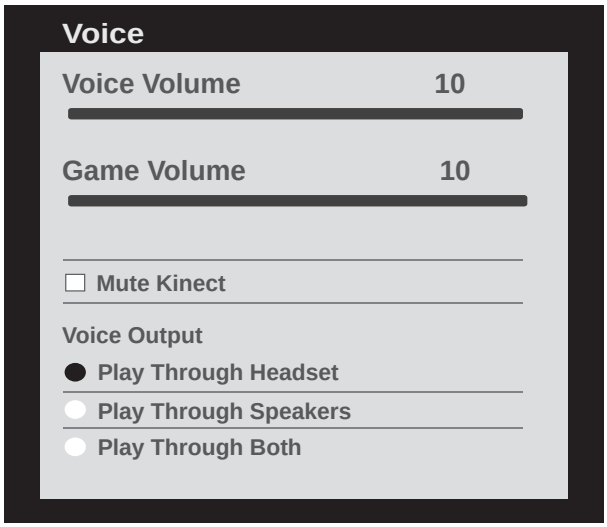

1. Go to XBOX Settings.
· Choose "System Settings"
· Choose "Console Settings"
· Choose "Audio"
· Choose "Digital Output"
· Set to "Dolby Digital 5.1"

2. Go back to XBOX Settings
· Choose "Preferences"
· Choose "Voice"
· Under "Voice Output," choose "Play Through Headset"

Using your Sierra Headset on PS3

1. Connect the Console Interface to the PS3 game console using the Digital Optical Cable and Console Interface USB cable as shown below. Connect the Digital Optical Cable to the Console Interface's DIGITAL IN jack.
2. Connect the Control Unit to the Console Interface as shown below. Utilize the Control Unit Extender Cable as necessary.
3. Connect the Sierra Headset to the Control Unit using the Headset Breakaway Cable as shown below.
4. (Optional) Connect your mobile phone or digital media player with a 3.5mm stereo cable (not included)

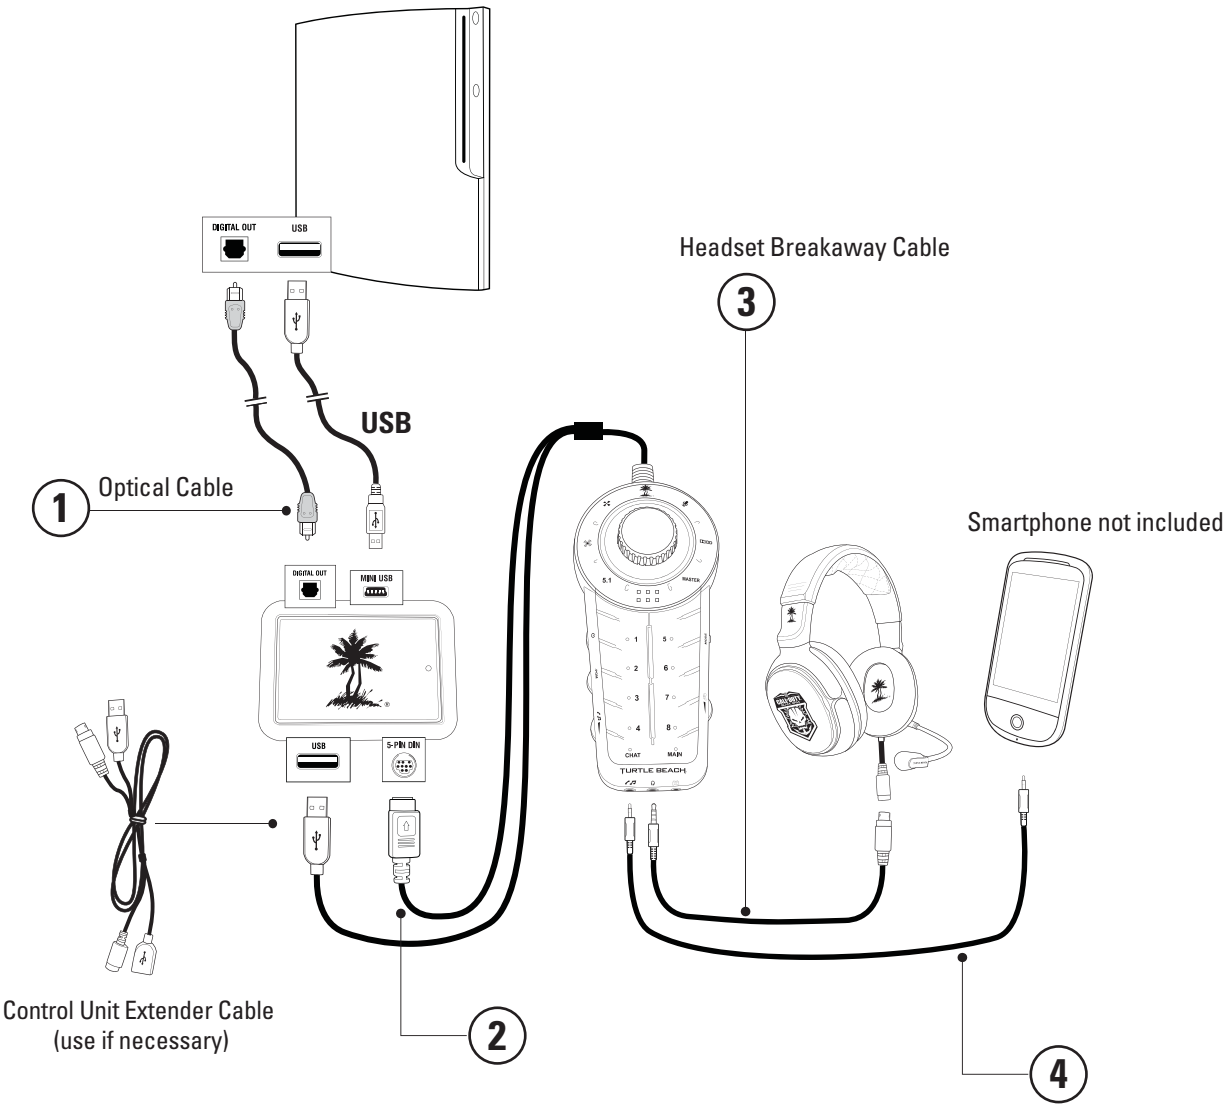

Using your Sierra Headset on PS3

PS3 Audio Configuration

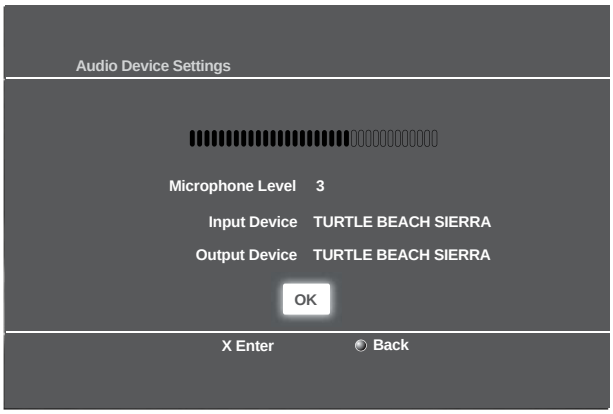

1. Go to "Settings"
   - Choose "Accessory Settings
   - Choose "Audio Device Settings"
   - Choose "Input / Output Device"
   - Choose "Turtle Beach Sierra"
2. Adjust microphone level

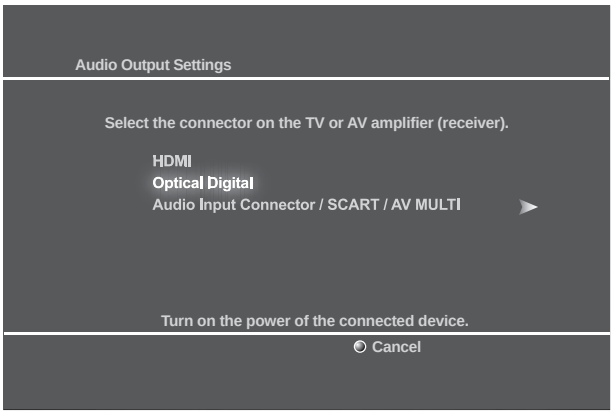
Audio Output Settings
Select the connector on the TV or AV amplifier (receiver).
HDMI
Optical Digital
Audio Input Connector / SCART / AV MULTI
Turn on the power of the connected device.
Cancel

1. Go to "Settings"
   - Choose "Sound Settings"
   - Choose "Audio Output Settings"
   - Choose "Optical Digital"
   - Choose "Dolby Digital 5.1 Ch."
2). Press "X" to save

0
12/14 12:15 PM
Audio Output Settings
Audio Multi-Output
On
Sets to output audio through multiple connectors simultaneously. Audio output to connectors that are not selected in [Audio Output Settings] is downscaled to 2 Ch.

1. Go to "Settings"
   - Choose "Sound Settings"
   - Choose "Audio Multi Output"
2. Press "X" to save

This allows simultaneous use of analog and digital/HDMI audio output.

Using your Sierra Headset on a PC / Mac

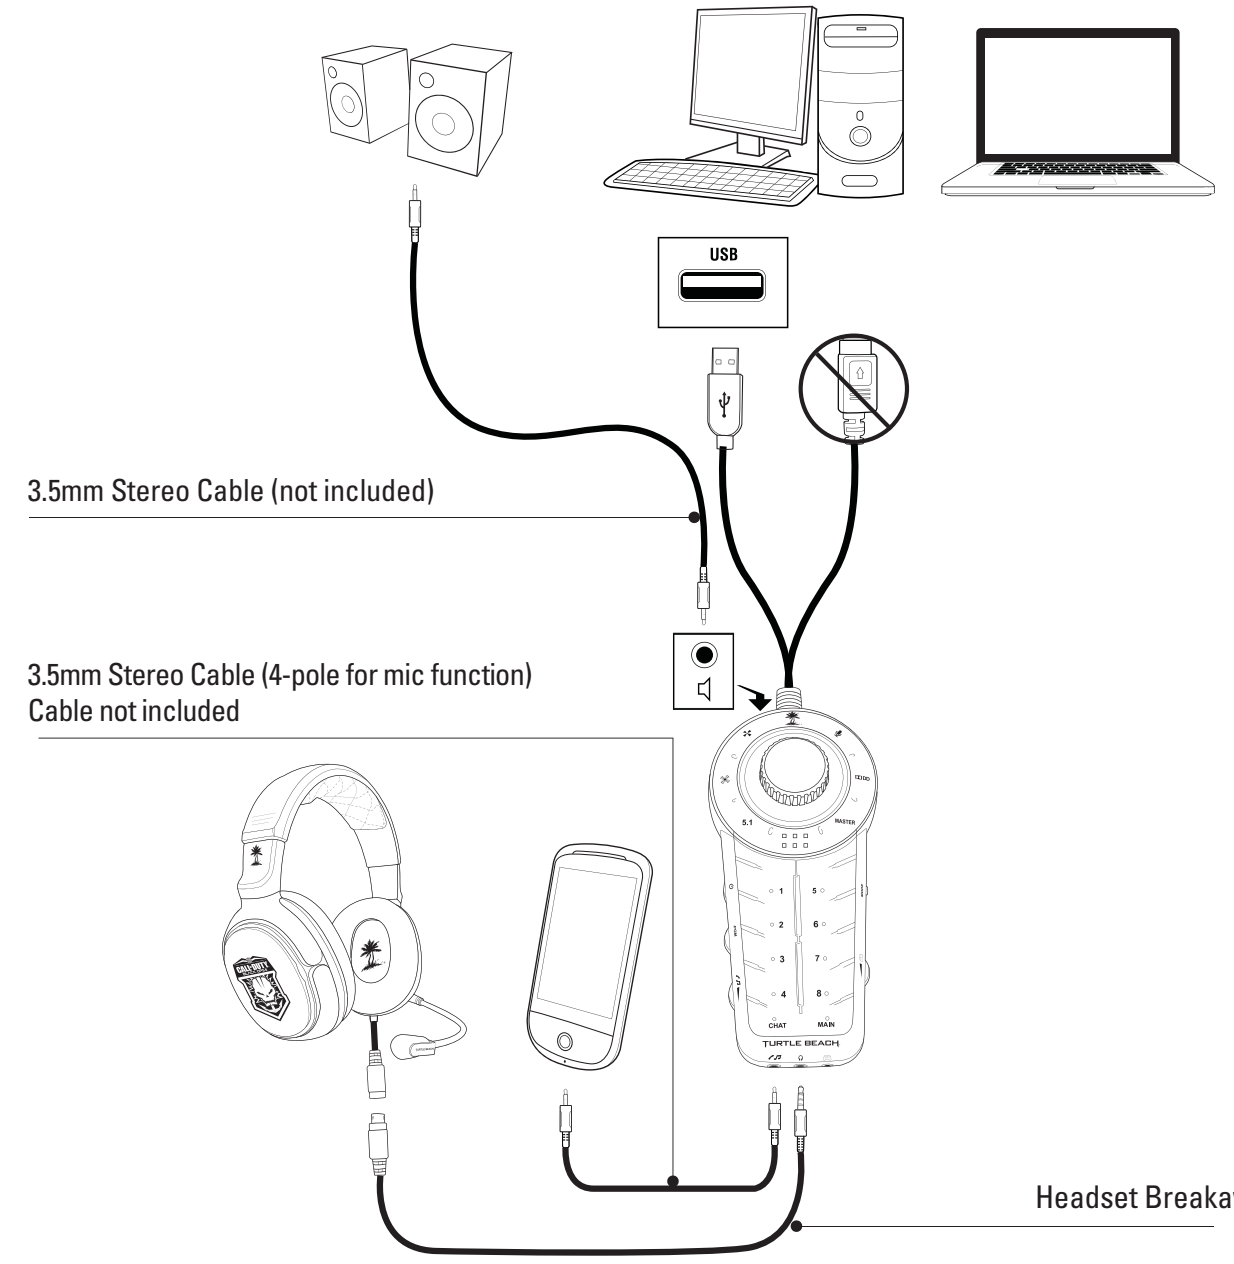

Computers and Smartphone not included

Using your Sierra Headset on a PC

1. Connect the Control Unit to your PC using the Digital Optical Cable. Allow five (5) minutes for Windows to automatically install drivers.

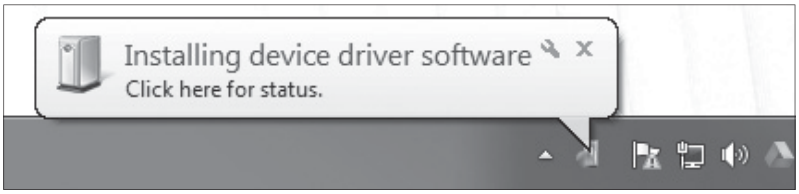

2. Once Windows successfully installs the drivers, power the unit OFF, then power ON again.

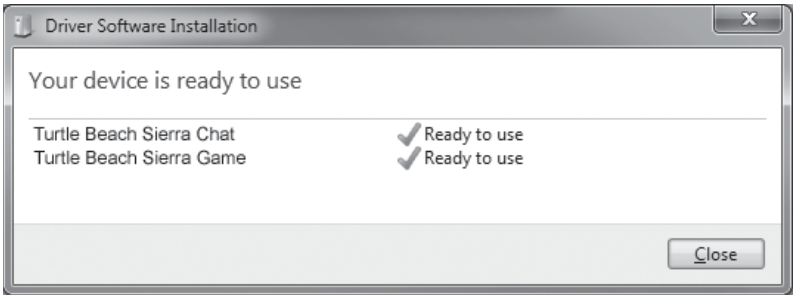

3. Using your mouse, right click the speaker icon on the task bar and select "Playback Devices."

4. Then right click on "Turtle Beach Sierra Game" and select "Set as Default Device."

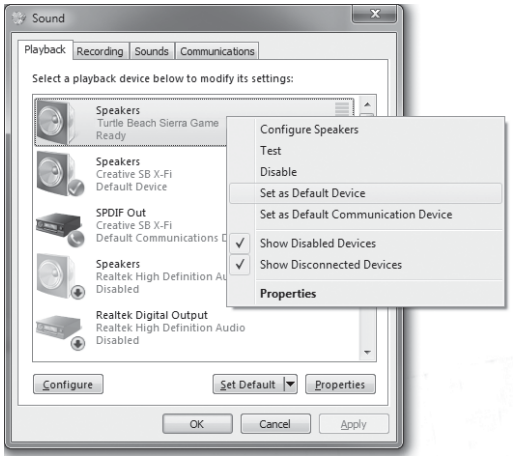

Using your Sierra Headset on a PC

5. Right click on "Turtle Beach Sierra Chat," and select "Set as Default Communication Device."

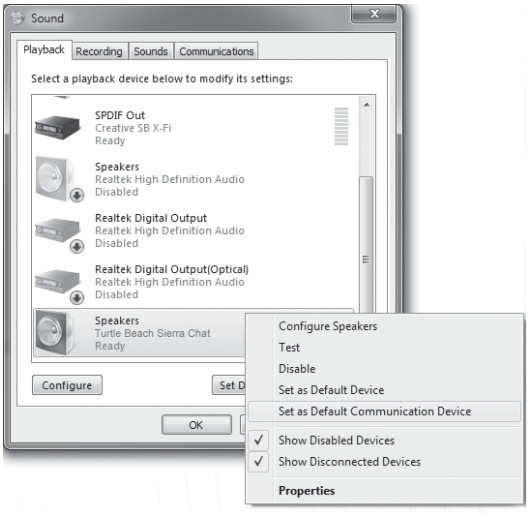

6. Left click "Turtle Beach Sierra Game," and click, "Configure," to confirm 5.1 channel audio.

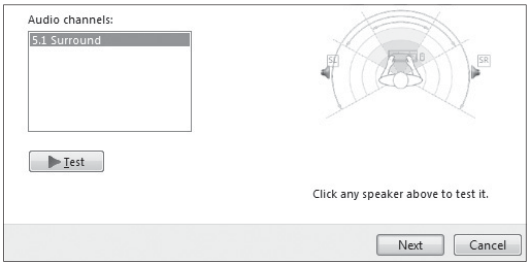

7. Press "Next" two (2) times to ensure that "Front Left and Right," and "Surround Speakers," are set to full range. Then press "Next" again to confirm setting.

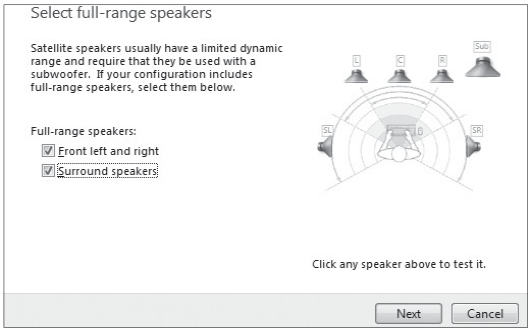
Select full-range speakers
Satellite speakers usually have a limited dynamic range and require that they be used with a subwoofer. If your configuration includes full-range speakers, select them below.
Full-range speakers:
Front left and right
Surround speakers
Click any speaker above to test it.
Next
Cancel

8. Click on the Recording tab followed by a right click on "Turtle Beach Sierra Chat," Select, "Set as Default Device." To test, speak into the microphone and green bars (on the right) will move.

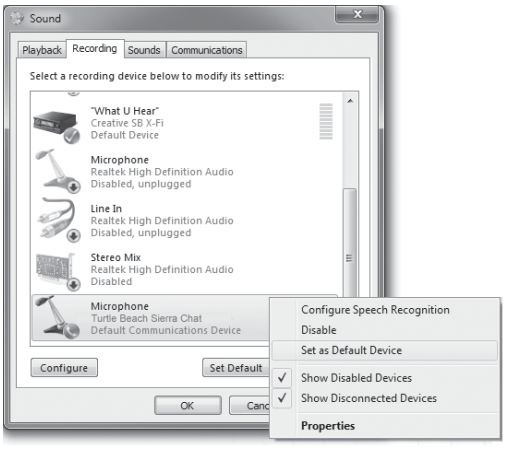

Using your Sierra Headset on a Mac

1. Connect the Control Unit to your Mac and go to System Preferences/ Sounds.
2. Select "Turtle Beach Sierra Game" on the Output tab.

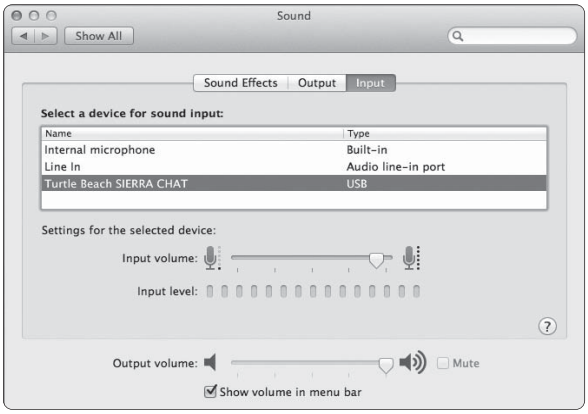

3. Select "Turtle Beach Sierra Chat" on the Input tab.

Chat program screens may differ depending on the operating system.

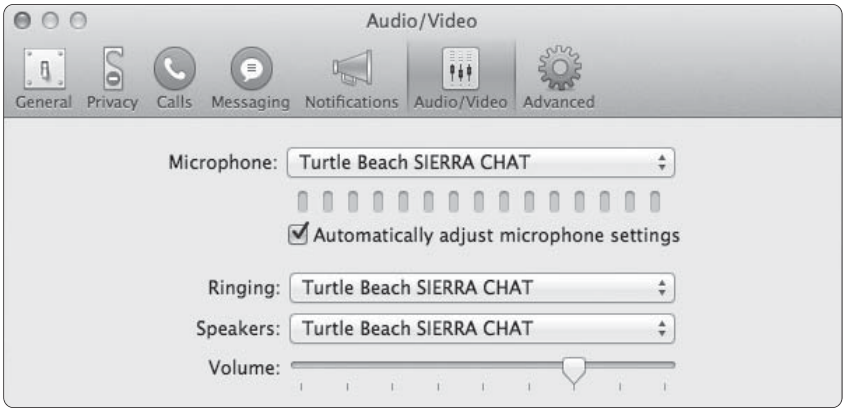

·Using Skype (download from www.skype.com), open your preferences. Go to Audio / Video and select, "Turtle Beach Sierra Chat," for microphone, ringing and speakers.

NOTE: Not all chat programs default to the Turtle Beach chat path. Some programs may require manual setup to output chat via the Turtle Beach Sierra Chat interface. If you experience a program sending out chat on the game path, this may be the reason.

Using your Sierra Headset with Other Devices

The 4-pole, 3.5mm jack in your Sierra Headset's Breakaway Cable allows you to enjoy great audio wherever you go by plugging into your mobile phone, portable game system, tablet, MP3 player and more.

Utilize the attached mic boom for chat or remove it and add a Mobile Adapter Cable (sold separately) for a more streamlined inline mic and call controls.

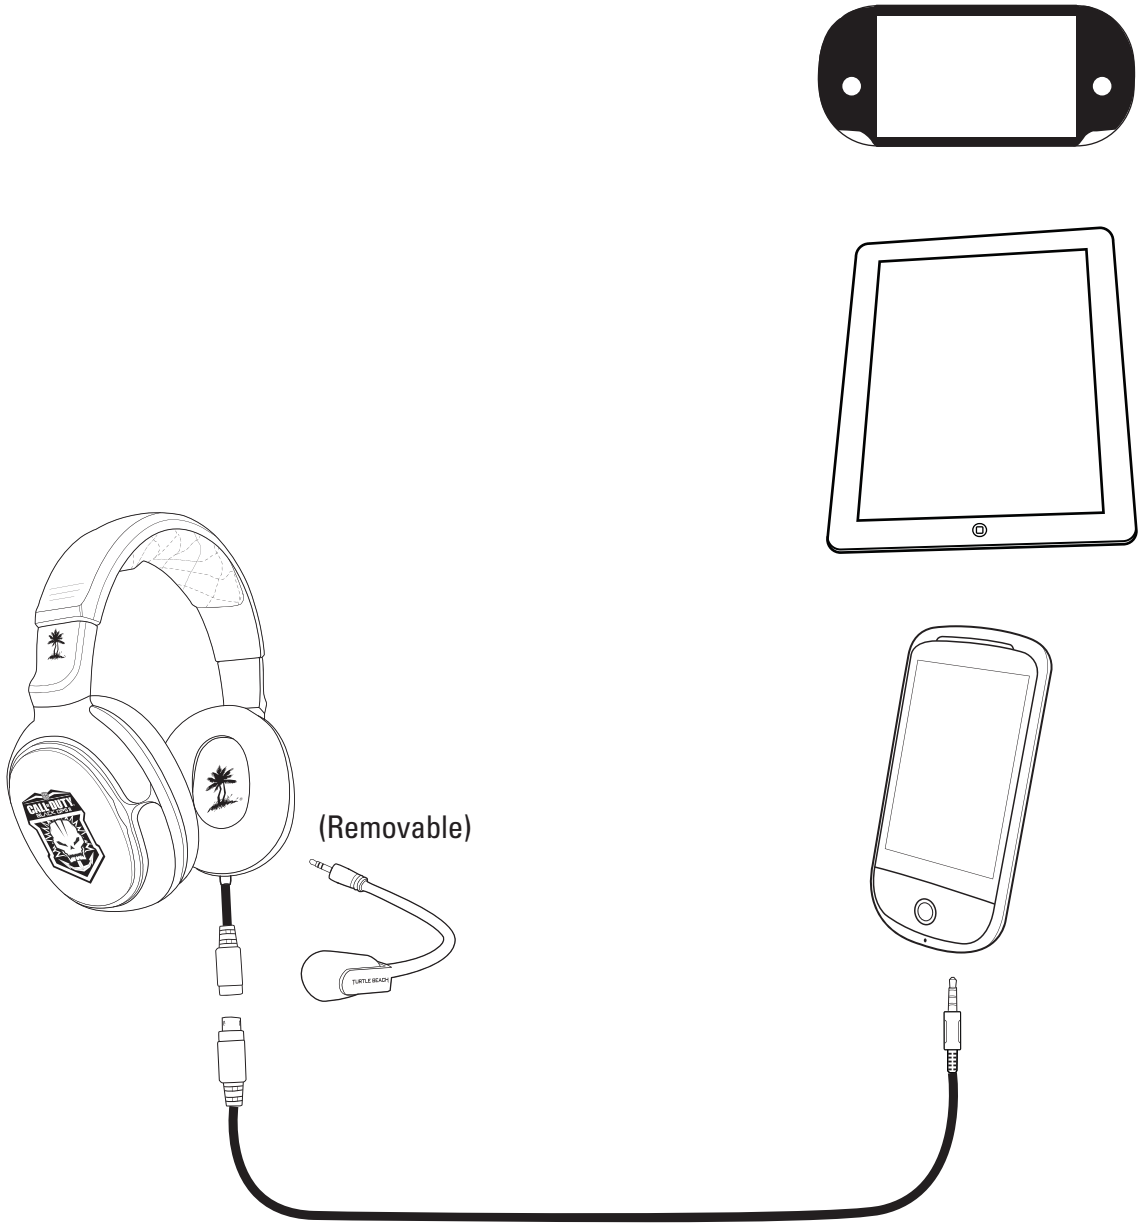

Speaker Mode

Turtle Beach Sierra Control Unit may be connected to a stereo speaker system. Note, the Headphone Jack is deactivated when in Speaker Mode.

1. Connect the Control Unit to a digital music player using a 3.5mm cable (not included) as shown.
2. Connect Desktop Speakers (not included) to the Control Unit using a 3.5mm cable as shown.
3. Connect PC to the Control Unit using USB cable as shown.
4. Press the Mode Button on the Control Unit until it lights blue indicating Speaker Mode is active.

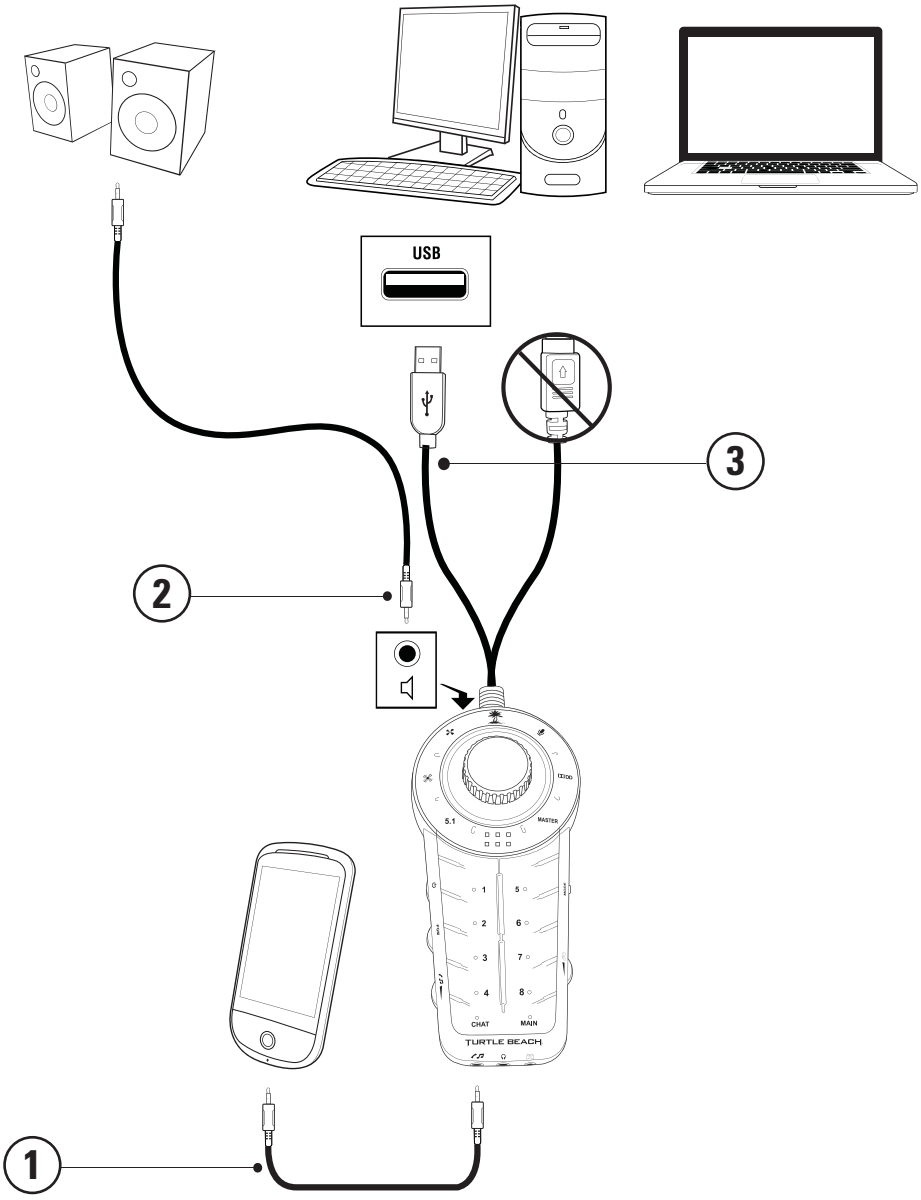

Presets

Your Sierra headset features several built-in presets on the Control Unit for enhanced gaming, voice and speaker effects. Simply tap the numbered preset on the Control Unit to switch Game Presets. Press the Chat Presets Button once to enable Chat Presets for buttons 1 – 8 to become Chat Presets (times out after 15 seconds). Press again to return to Game Presets.
Speaker Presets are only available when in Speaker Mode.
To download and use new presets, create your own presets or simply manage presets and Control Unit functions, visit Turtle-Beach.com/presets to register your product and download the Advanced Sound Editor (ASE) tool. Refer to the ASE User Guide for instructions on managing and creating presets.

Game Presets

Main: Incorporates Dolby® Surround Sound processing for an immersive audio experience.
1. Flat: Hear stereo game sound without effects processing or Dolby Surround Sound.
2. Bass Boost: Hear and feel the rumble of deeper bass sound effects.
3. Treble Boost: Boost high frequencies for crisper sounds and greater clarity.
4. Bass Boost & Treble Boost: Rumbling lows and crisp highs come through clearly.
5. Stereo Expander: Stereo processing widens the left and right channels further away from the center.
6. Action Enhancer: Amplify intense sounds from weapons and explosions.
7. Footstep Focus: Focus on the sound of enemy footsteps approaching.
8. Superhuman Hearing: Boosts low volume sounds.

Chat Presets

Main: Chat Boost automatically increases the online chat levels during intense gaming sequences, so communication from team-mates isn't drowned out.
1. Flat: Straight chat with no processing.
2. Chat Focus: Boosts mid-range frequencies for greater concentration on chat.
3. Chat Expander: Widens the virtual sound field for chat.
4. Voice Amp: Amplifies chat volume.
5. Hi-Pitch Morph: Morph your voice into a high-pitch tone.
6. Lo-Pitch Morph: Bring your voice to demonic depths.
7. Robot: Transform your voice into a metallic sound.
8. Max Chat: Combines presets in an enhanced chat package.

Presets / Specifications

Speaker Presets

Main: Incorporates Dolby® Surround Sound processing for an immersive audio experience.

1. Flat: Hear stereo game sound without effects processing or Dolby Surround Sound.
2. Bass Boost: Hear and feel the rumble of deeper bass sound effects.
3. Treble Boost: Boost high frequencies for crisper sounds and greater clarity.
4. Bass Boost & Treble Boost: Rumbling lows and crisp highs come through clearly.
5. Speech Amplifier: Focuses on human voice frequency range for clearer dialogue.
6. Balance: Balances Low, Mid, and High Frequencies.
7. Action Enhancer: Amplifies intense sounds from weapons and explosions.
8. Superhuman Hearing: Boosts low volume sounds.

Specifications

· Audio Connection: Digital Optical
· PC Audio Connection: USB
· PS3 Mic. Connection: USB
· XBOX 360 Mic. Connection: 2.5mm Chat Cable
· Power: USB

Regulatory Compliance

Federal Communications Commission (FCC) Compliance Notices
This section includes the following FCC statements for the EAR FORCE SIERRA RX & TX Models:
· FCC ID: XGB-TB2276 & XGB-TB2271
· Class B Interference Statement
· RF Radiation Exposure & Hazard Warning
· Non-Modification Statement
· Deployment Statement

Class B Interference Statement
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
· Reorient or relocate the receiving antenna.
· Increase the separation between the equipment and receiver.
· Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
· Consult the dealer or an experienced radio/TV technician for help.

FCC Caution:
This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

RF Radiation Exposure & Hazard Statement
To ensure compliance with FCC RF exposure requirements, this device must be installed in a location such that the antenna of the device will be greater than 20 cm (8 in.) from all persons. Using higher gain antennas and types of antennas not covered under the FCC certification of this product is not allowed. Installers of the radio and end users of the product must adhere to the installation instructions provided in this manual. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Non-Modification Statement
Use only the supplied internal antenna. Unauthorized antennas, modifications, or attachments could damage the EAR FORCE SIERRA RX & TX Models and violate FCC regulations. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment. Please contact Turtle Beach for a list of approved 2.4 GHz and 5.0 GHz antennas.

Regulatory Compliance

Canadian ICES Statements
IC: 3879A- TB2290 & 3879A- TB2291
This device complies with ICES-003 and RSS-210 of Industry Canada.
Operation is subject to the following two conditions:
1. This device may not cause interference, and
2. This device must accept any interference, including interference that may cause undesired operation of the device.

Ce dispositif est conforme aux normes NMB003 et CNR-210 d'Industrie Canada.
1. L'utilisation de ce dispositif est autorisée seulement aux conditions suivantes :
2. il ne doit pas produire de brouillage et l'utilisateur du dispositif doit être prêt à accepter tout brouillage radioélectrique reçu, même si ce brouillage est susceptible de compromettre le fonctionnement du dispositif.

To prevent radio interference to the licensed service (i.e. co-channel Mobile Satellite systems) this device is intended to be operated indoors and away from windows to provide maximum shielding. Equipment (or its transmit antenna) that is installed outdoors is subject to licensing and not supported by EAR FORCE SIERRA RX & TX Models.

RF Radiation Exposure & Hazard Statement
To ensure compliance with RSS-102 RF exposure requirements, this device must be installed in a location such that the antenna of the device will be greater than 20 cm (8 in.) away from all persons. Using higher gain antennas and types of antennas not covered under the IC certification of this product is not allowed. Installers of the radio and end users of the product must adhere to the installation instructions provided in this manual. This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

Exposition aux radiations RF & Mention de danger
Pour assurer la conformité avec les exigences RSS-102 d'exposition aux RF (Radio Fréquences), cet appareil doit être installé dans un endroit ou l'antenne de l'appareil sera située à une distance de plus de 20 cm (8 po) de toutes personnes. L'utilisation d'antennes à gain plus élevé et les types d'antennes qui ne sont pas couverts en vertu de la certification IC de ce produit n'est pas autorisée. Les installateurs de la radio et les utilisateurs du produit final doivent se conformer aux instructions d'installation fournies dans ce manuel. Cet émetteur ne doit pas être co-implanté ou exploité en conjonction avec toute autre antenne ou transmetteur.

Deployment Statement
This product is certified for indoor deployment only in the 5150 – 5250 MHz band. Do not install or use this product outdoors in that frequency band in Canada.

Déclaration de déploiement
Ce produit est certifié pour le déploiement à l'intérieur tout en rencontrant les limites de cette bande de fréquences: 5150 - 5250 MHz. Ne pas installer ou utiliser ce produit à l'extérieur au Canada, si cette bande de fréquences ne peut ne peut être rencontrée.

Declaration of Conformity

European Union and European Fair Trade Association Regulatory Compliance

This equipment may be operated in the countries that comprise the member countries of the European Union and the European Fair Trade Association. These countries, listed below, are referred to as The European Community throughout this document:

AUSTRIA, BELGIUM, BULGARIA, CYPRUS, CZECH REPUBLIC, DENMARK, ESTONIA, FINLAND, FRANCE,, GERMANY, GREECE, HUNGARY, IRELAND, ITALY, LATVIA, LITHUANIA, LUXEMBOURG, MALTA, NETHERLANDS, POLAND, PORTUGAL, ROMANIA, SLOVAKIA, SLOVENIA, SPAIN, SWEDEN, UNITED KINGDOM, ICELAND, LICHTENSTEIN, NORWAY, SWITZERLAND

Marking by this symbol: CE ◑

indicates compliance with the Essential Requirements of the R&TTE Directive of the European Union (1999/5/EC). This equipment meets the following conformance standards:

Safety: EN 60950-1: 2006 + A11 (GS License)
Also Licensed for Standards: IEC 60950-1:2005, (CB Scheme Report/Certificate), UL60950-1 (NRTL License), CSA22.2, 60950-1 (SCC License)
Additional licenses issued for specific countries available on request.
EMC: EN 55022: 2006, EN 55024: 1998 + A1:2001 + A2: 2003
EN 301 489-1 v1.8.1 (2008-04),
EN 301 489-17 v2.1.1 (2009-05), CISPR22: 2005, CISPR24
Including EN 61000-3-2, -3-3, -4-2, -4-3, -4-4, -4-5, -4-6 and -4-11
The products are licensed, as required, for additional country specific standards for the International Marketplace. Additional issued licenses available upon request.

Radio: EN 300328 v.1.7.1 (2006-10) & EN 301 893 v.1.5.1 (2008-12)
Electromagnetic compatibility and Radio spectrum Matters (ERM); Wideband transmission systems; Data transmission equipment operating in the 2,4 GHz ISM band and using wide band modulation techniques and Broadband Radio Access Networks (BRAN); 5 GHz high performance RLAN.
Certifications are harmonized to the EN standards covering essential requirements under article 3.2 of the R&TTE Directive. Compliance includes testing with antennas as specified in attached table.
SAR: EN 62311: 2008
Environmental : Low Voltage Directive 2006/95/EC,
RoHS 2002/95/EC
WEEE 2002/96/EC

European Community Declaration of Conformity

Bulgaria / български: С това, nortel обявява, че този модел на радио на Product A, е със съгласие с съществените изисквания и други важни условия на директива 1999/5 на европейски съюз

Czech Republic I Èesky: Norteltímto prohlašuje, že tento Product A, je ve shodì se základními požadavky a dalšími pøíslušnými ustanoveními smìrnice 1999/5/ES.

Denmark I Dansk: Undertegnede Nortelerklærer herved, at følgende udstyr Product A, overholder de væsentlige krav og øvrige relevante krav i direktiv 1999/5/EF.

English I English: Hereby, Nortel declares that this Product A, is in compliance with the essential requirements and other relevant provisions of Directive 1999/5/EC.

Estonia I Eesti: Käesolevaga kinnitab Nortelseadme Product A, vastavust direktiivi 1999/5/EÜ põhinõuetele ja nimetatud direktiivist tulenevatele teistele asjakohastele sätetele.

Finland I Suomi: Nortelvakuuttaa täten että Product A, tyyppinen laite on direktiivin 1999/5/EY oleellisten vaatimusten ja sitä koskevien direktiivin muiden ehtojen mukainen.

France I Français: Par la présente Norteldéclare que l'appareil Product A, est conforme aux exigencies essentielles et aux autres dispositions pertinentes de la directive 1999/5/CE.

German I Deutsch: Hiermit erklärt Nortel., dass sich das Gerät Product A, in Übereinstimmung mit den grundlegenden Anforderungen und den übrigen einschlägigen Bestimmungen der Richtlinie 1999/5/EG befindet.

Greece I Ελληνική: ΜΕ ΤΗΝ ΠΑΡΟΥΣΑ Nortel.ΗΛ.ΝΕΙ ΟΤΙ Product A, ΣΥΜΜΟΡΦ.ΝΕΤΑΙ ΠΡΟΣ ΤΙΣ ΟΥΣΙ..ΕΙΣ ΑΠΑΙΤΗΣΕΙΣ ΚΑΙ ΤΙΣ ΛΟΙΠΕΣ ΣΧΕΤΙΚΕΣ .ΙΑΤΑΞΕΙΣ ΤΗΣ Ο.ΗΓΙΑΣ 1999/5/ΕΚ.

Hungary I Magyar: Alulírott, Nortelnyilatkozom, hogy a Product A, megfelel a vonatkozó alapvetõ követelményeknek és az 1999/5/EC irányelv egyéb elõírásainak.

Italy I Italiano: Con la presente Norteldichiara che questo Product A, è conforme ai requisiti essenziali ed alle alter disposizioni pertinenti stabilite dalla direttiva 1999/5/CE.

Latvia I Latviski: Ar šo Norteldeklarç, ka Product A, atbilst Direktîvas 1999/5/EK bûtiskajâm prasîbâm un citiem ar to saistîtajiem noteikumiem.

Lithuania I Lietuviø: Šiuo Norteldeklaruoja, kad šis Product A, atitinka esminius reikalavimus ir kitas 1999/5/EB Direktyvos nuostatas.

Malta I Malti: Hawnhekk, Nortel., jiddikjara li dan Product A, jikkonforma mal-tiijiet essenzjali u ma provvedimenti orajn relevanti li hemm fid-Dirrettiva 1999/5/EC.

Netherlands I Netherlands: Hierbij verklaart Norteldat het toestel Product A, in overeenstemming is met de essentiële eisen en de andere relevante bepalingen van richtlijn 1999/5/EG.

Poland I Polski: Niniejszym Nortelooewiadcza, ¿e Product A, jest zgodny z zasadniczymi wymogami oraz pozosta^{3}ymi stosownymi postanowieniami Dyrektywy 1999/5/EC.

Portugal I Português: Norteldeclara que este Product A, está conforme com os requisitos essenciais e outras disposições da Directiva 1999/5/CE.

Romania I Român: Astfel, Nortel declarã acel acest WLAN Radio Model 2332, este în conformitate cu cerinþele necesare °i proviziile alte semnificative de Directive 1999 5 EC.

Slovakia I Slovensky: Norteltýmto vyhlasuje, že Product A spåòa základné požiadavky a všetky príslušné ustanovenia Smernice 1999/5/ES.

Slovenia I Slovensko: Nortelizjavlja, da je ta Product A, v skladu z bistvenimi zahtevami in ostalimi relevantnimi doloèili directive 1999/5/ES.

Spain I Español: Por medio de la presente Norteldeclara que el Product A, cumple con los requisitos esenciales y cualesquiera otras disposiciones aplicables o exigibles de la Directiva 1999/5/CE.

Sweden I Svenska: Härmed intygar Nortelatt denna Product A, står I överensstämmelse med de väsentliga egenskapskrav och övriga relevanta bestämmelser som framgår av direktiv 1999/5/EG.

LIMITED ONE YEAR WARRANTY FOR TURTLE BEACH PRODUCTS:

Voyetra Turtle Beach, Inc. ("VTB") warrants to the original end-user purchaser ("Purchaser") that the retail Turtle Beach hardware product herein ("Product") will be free of defects in materials and workmanship for a period of one year from the date of purchase by the Purchaser ("Warranty Period"). Any Extended Warranty or Service Plans purchased through a Retail store are not honored by VTB. The Warranty refers to the repair/replacement of a defective product during this period and not a refund.

This limited warranty is extended only to the original Purchaser of a new product, which was not sold "AS IS". It is not transferable or assignable to any subsequent purchaser. This limited warranty is applicable only in the country or territory where the Product was purchased from an authorized VTB retailer and does not apply to a Product that has been purchased as used or refurbished or was included as part of a non-VTB product.

WARRANTY SERVICE:
In the USA and CANADA Warranty Service is provided by our Turtle Beach USA offices and in all other Countries it is provided by our local International Distributors when available. Refurbished/Recertified products are sold on an AS IS basis with a 90-day Warranty or less in accordance with each vendor's policy.
VTB does not warrant uninterrupted or error-free operation of the Product and is under no obligation to support the Product for all computer operating systems or future versions of such operating systems.

If a defect should occur during the Warranty Period, Purchaser must contact VTB to obtain a Return Merchandise Authorization ("RMA") number on the basis of the dated purchase receipt. Purchaser will be responsible for shipping costs incurred in returning the defective Product to an authorized VTB service center, or to the repair facility located at VTB's corporate headquarters. VTB will not be responsible for other products or accessories included with the defective Product sent to VTB. The RMA number must be clearly indicated on the outside of the package. Packages without an RMA number will be refused by VTB or its representatives and returned to sender at the sender's expense.
In the event of a defect, Purchaser's sole and exclusive remedy, and VTB's sole liability, is expressly limited to the correction of the defect by adjustment, repair, or replacement of the Product at VTB's sole option and expense. VTB owns all Products it has replaced and all parts removed from repaired Products. VTB uses new and reconditioned parts made by various manufacturers in performing warranty repairs and building replacement products. If VTB repairs or replaces a product, the original Warranty Period is not extended, however, VTB warrants that repaired or replacement parts will be free from defects in material and workmanship for a period of thirty (30) days from the date of repair or replacement, or for the remainder of the Warranty Period, whichever is greater.

This warranty does not apply to any Product that has had its serial number altered, removed or defaced, or any Product damage caused by shipping, improper storage, accident, problems with electrical power, abuse, misuse, neglect, ordinary wear, acts of God (e.g. flood), failure to follow directions, improper maintenance, use not in accordance with product instructions, unauthorized modification or service of the Product or damage resulting from the use of the Product with hardware, software or other products not provided by or specifically recommended by VTB.

NOTES:
- Replacement Parts and accessories that are subject to "wear and tear" such as earpads, mic foam covers, talkback cables, etc. have a three (3) month Warranty.
- Replacement Parts for Discontinued Products are sold on an AS IS basis, they are not supported and come with a 30 day Warranty.

THIS LIMITED WARRANTY IS PURCHASER'S SOLE AND EXCLUSIVE REMEDY AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESS OR IMPLIED. TO THE EXTENT PERMITTED BY APPLICABLE LAW, VTB HEREBY DISCLAIMS THE APPLICABILITY OF ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR USE FOR THE PRODUCT. IF SUCH A DISCLAIMER IS PROHIBITED BY APPLICABLE LAW, THE IMPLIED WARRANTY IS LIMITED TO THE DURATION OF THE FOREGOING LIMITED WRITTEN WARRANTY.

IN NO EVENT SHALL VTB BE LIABLE FOR ANY INDIRECT, INCIDENTAL, SPECIAL, PUNITIVE OR CONSEQUENTIAL DAMAGES, OR DAMAGES, INCLUDING BUT NOT LIMITED TO ANY LOST PROFITS, DATA, OR LOSS OF USE, ANY THIRD PARTY CLAIMS, AND ANY INJURY TO PROPERTY OR BODILY INJURY (INCLUDING DEATH) TO ANY PERSON, ARISING FROM OR RELATING TO THE USE OF THIS PRODUCT OR ARISING FROM BREACH OF THE WARRANTY, BREACH OF CONTRACT, NEGLIGENCE, TORT, OR STRICT LIABILITY, EVEN IF VTB HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.
This warranty supersedes all prior agreements or understandings, oral or written, relating to the Product, and no representation, promise or condition not contained herein will modify these terms. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above exclusion or limitation may not apply to you. This warranty gives you specific legal rights. You may also have other rights, which vary from state to state. Any action or lawsuit for breach of warranty must be commenced within eighteen (18) months following the purchase of the Product.

EXCLUSIONS FROM LIMITED WARRANTY:
This Limited Warranty shall not apply and VTB has no liability under this Limited Warranty if the Turtle Beach Product:
- is used for commercial purposes such as "LAN, Call Centers" (including rental or lease);
- is modified or tampered with;
- is damaged by Acts of God, power surge, misuse, abuse, negligence, accident, wear and tear, mishandling, misapplication, or other causes unrelated to defective materials or workmanship;
- serial number is defaced, altered or removed;
- is not used in accordance with the documentation and use instructions; or
- is repaired, modified or altered by other than authorized repair centers.
- Product is no longer available because it was discarded.